

VSVA-ED401 / VSVA-ED801

4/ 8-Port VGA+Audio Switch with Serial & Auto-sensing function

Specifications


| | | VSVA-ED401 | VSVA-ED801 |
|--------------------------|-------------|---|-------------------------------|
| Number of Video Input | | 48 | |
| Connector | Input | HDB15-F x 4 Audio Jack x 4 | HDB15-F x 8 Audio Jack x 8 |
| | Output | HDB15-F x 1 Audio Jack x 1 | |
| LED Indicator | Power | 1 | |
| | Video Input | x 4x | 8 |
| EDID Copy Button | | | |
| Video Resolution (max.) | | Full HD (1920 x 1080) WUXGA (1920 x 1200) 1920 x 1440 | |
| Remote Control Support | | es | |
| Serial Control Support | | es | |
| Enclosure | | etal | |
| Power Consumption (max.) | | .5W | |

Also available

VSA-ED201 / VSA-ED401 / VSA-ED801:
2/4/8-Port VGA Switch with Auto-sensing function

VSA-ED221:
2-Port VGA Switch with Auto-sensing &
EDID emulation function

Connection Pattern

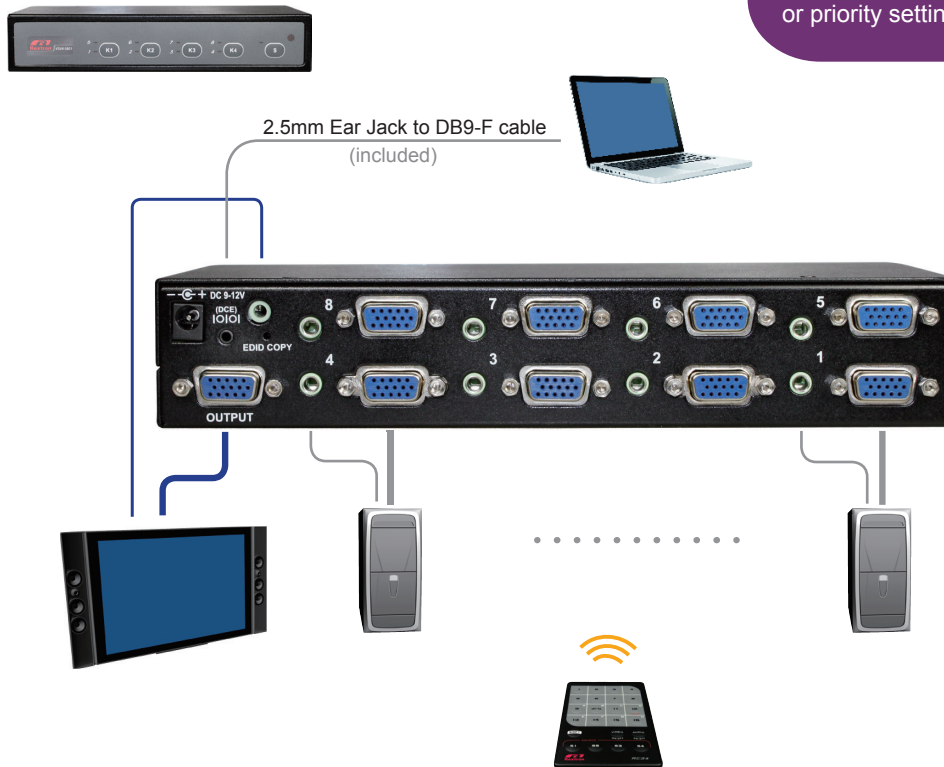

Features

- Select 1 VGA + Audio from 4/8 different VGA + Audio sources
- Provide 2 ways to control the unit via
(1) Front panel push button
(2) IR Remote control
(3) Serial control
- EDID Copy function makes the optimal resolution for your application
- Auto-scan function automatically selects VGA sources sequentially
- Selectable Scan Time Setting
- Enable/ Disable Output Port Video Signal
- Enable/ Disable Output Port Audio Signal
- Lock Push Button & IR Remote Control
- LED shows the active status of video input source
- Support up to Full HD 1080p / 1920 x 1200
- Compatible with most of the popular screen resolution to XGA, SXGA, UXGA, WSXGA Full HD, WUXGA system

EGO Functions

- Versatile port selection functions of Priority, Auto-sensing and Switch modes
- Priority:** System will automatically select Source-1 to display
(Priority: Source-1 > Source-2 >)
- Auto-sensing:** System will automatically select the latest video source to display
- User-friendly port switching via button pressing or priority setting