
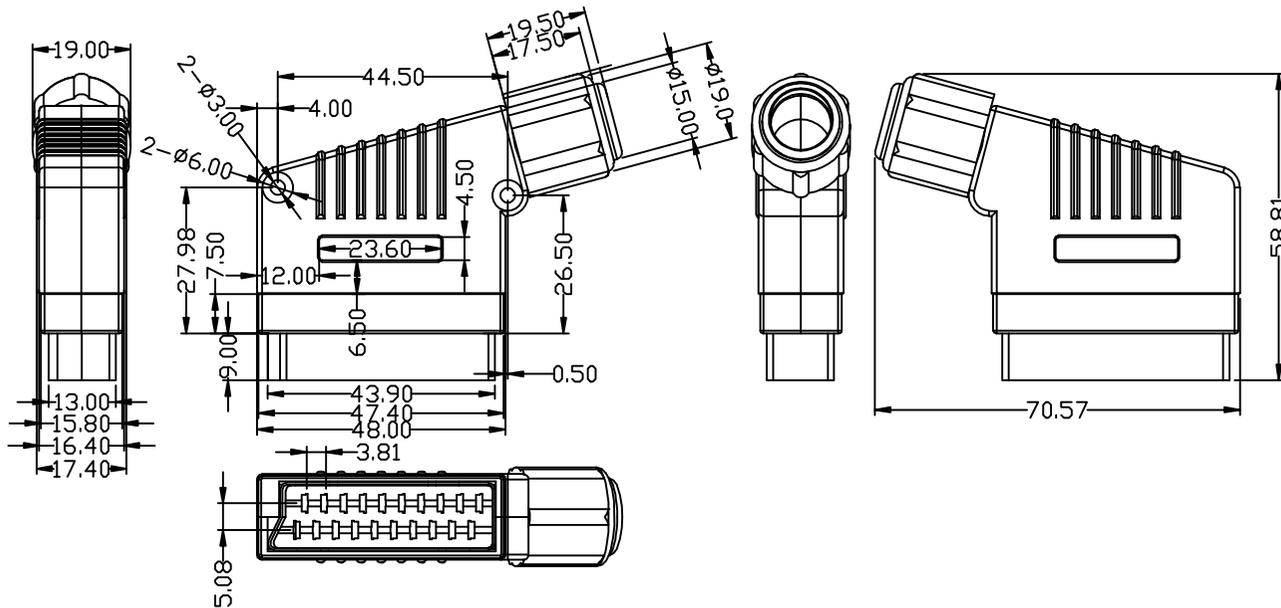



# Standard Drawing:

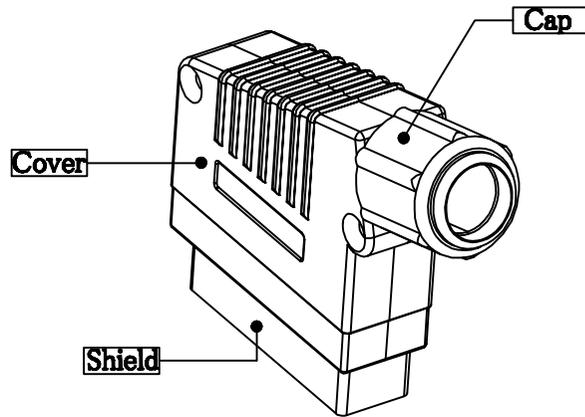

## MATERIAL & FINISH FOR SCART PLUG:

- 1.INSULATOR : PBT & GLASS-FIBER
- 2.COVER : ZINC ALLOY & PLATED
- 3.CONTACT SPACING : 3.81mm PTCH
- 4.PIN CONTACT : A.BRASS TIN PLATING  
B.BRASS GOLD PLATING
- 5.METAL SHIELD :  
A.STAINLESS  
B.BRONZE GOLD PLATED

## Inspection conditions :

- A. Current rating : 3A/250Vac
- B. Thermal shock :  $\frac{-55\text{ C}}{30\text{ Min}} \sim \frac{25\text{ C}}{5\text{ Min}} \sim \frac{105\text{ C}}{30\text{ Min}}$
- C. Contact resistance : Current 100mA
- D. Insulation resistance : Voltage DC 500V  
Duration: 1Min .
- E. Dielectric withstanding voltage: Volage 1000Vac  
Duration : 1Min
- F. Measnrng environment : Temp 25-C , Humidity 66%R.H.

Note:  
Technical modifications reserved;  
no responsibility is acceptefor the accuracy of this information.

Date: 06.09.2017	AB	
Edited by: 06.09.2017	AB	
Checked by: 06.09.2017	FM	
Revision:		
Part number: SCART-ST-VMG		

Scart Connector male type, fully metall housing,  
gold contact for solder