




NOTE: MOLDED HOOD LOGO

0.1M ~ 3.0M : High Speed HDMI®
3.1M ~ 5.0M : Standard HDMI®



PINOUT CONFIGURATION

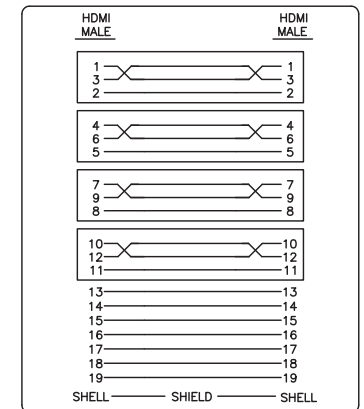

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED PINS UL94V-0	2	PCS.
	BLACK MOLDED PVC HOOD	2	PCS.
2	PAT. US 6,287,148 B1 RF-BLOK™SHIELDING METAL CAN	2	PCS.
3	(100Ω SHIELDED TWISTED PAIRS)x4+7C WIRE; AL-FOIL+DRAIN	SEE	DWG.
4	+85% BRAID; BLACK PVC JACKET. LEVEL-2		

NOTE:

- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™-SHIELDING DESIGN.
- WIRE MARKING:

(TTL)® E193793 AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES. LTD. (1 INCH) <<< 20.4 Gbps
HIGH-SPEED 8.3 Mega Pixels CABLE DigiBahn™ H2.0 LEVEL-2 SERIES DIGITAL AV CABLE >>>

P/N	L±(mm)
CK-HDMI-010N	1000±50
CK-HDMI-020N	2000±50
CK-HDMI-030N	3000±100
CK-HDMI-050N	5000±150

HDMI cable male -male, black. Resolution up to UHD/HDMI 2.0, RF-BLOK shield.

HDMI-Kabel Stecker - Stecker, schwarz. Auflösung bis zu UHD/HDMI 2.0, RF-BLOK Abschirmung.



WEEE-Reg.-Nr. DE 38986660

Date:
11.08.2022

SP

Checked by:
11.08.2022

FM

Datasheet:

CK-HDMI-XXXN

