


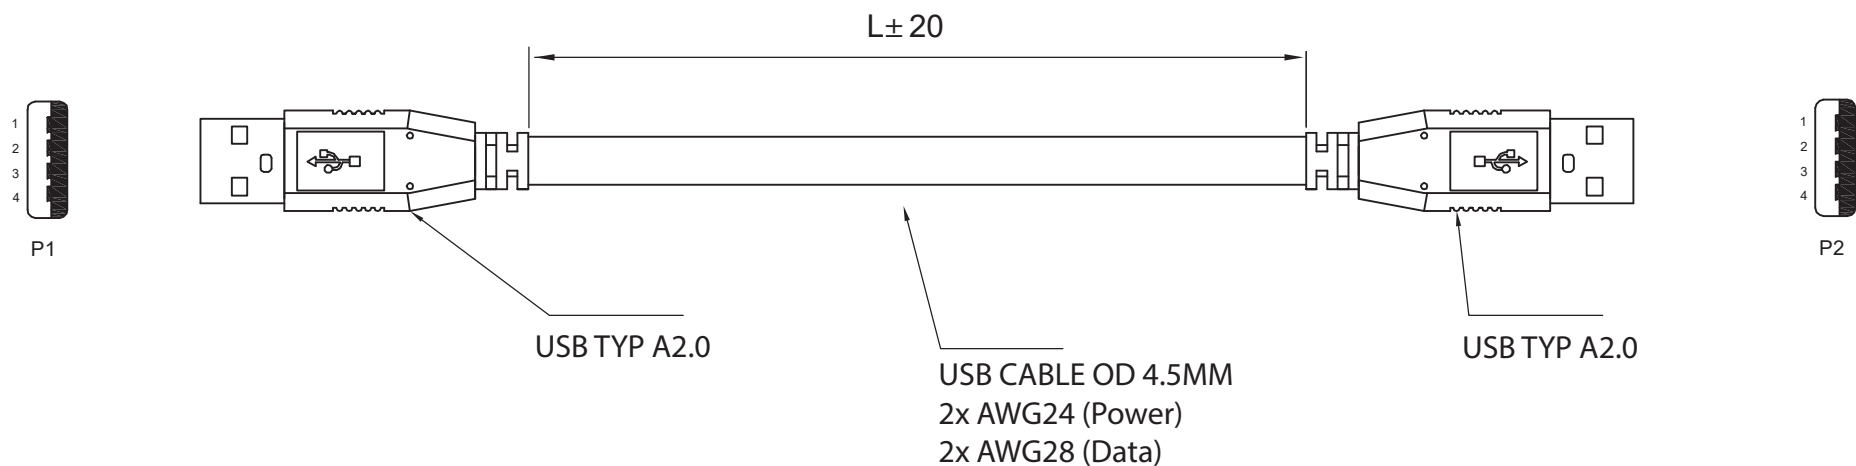

CABLE SPEC:

7/0.12TC*1P+7/0.20TC*2C+AL+1/0.32BC+48/0.12AL
OD: 4.5M,UL

USB 2.0 Hi-Speed Kabel

- USB 2.0 Kabel zum Synchronisieren und Laden
- Hi-Speed Datenübertragungen bis 480 Mbit/s


Anschlüsse: 2x USB-A 2.0 Stecker
Kontakte: vernickelt
Material Gehäuse: PVC 45P
Material Kabelmantel: PVC
AD Kabel: 4,5 ± 0,2 mm
Leiterwiderstand: 15 Ω max.
Isolationswiderstand: 5 MΩ min.

USB 2.0 Hi-Speed cable

- USB 2.0 cable for synching and charging
- Hi-speed data transmission up to 480 Mbit/s

Connectors: 2x USB-A 2.0 plug
Contacts: nickel plated
Material housing: PVC 45P
Material cable jacket: PVC
OD cable: 4.5 ± 0.2 mm
Conductor resistance: 15 Ω max.
Insulation resistance: 5 MΩ min.

CONDUCT WIRE CONNECT

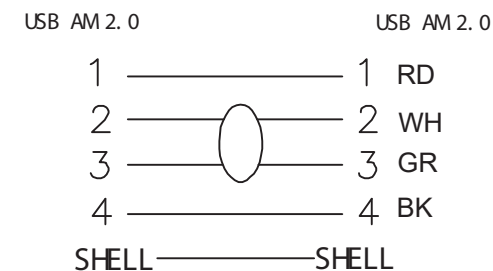

USB 2.0 Hi-Speed Cable

USB 2.0 Hi-Speed Kabel

P/N	L (m)
CK-USB2.0AA-005SW24	0,5m
CK-USB2.0AA-010SW24	1,0m
CK-USB2.0AA-018SW24	1,8m
CK-USB2.0AA-030SW24	3m
CK-USB2.0AA-050SW24	5m



WEEE-Reg.-Nr. DE 38986660

Date:
15.09.2022

SP

Checked by:
15.09.2022

FM

Datasheet:

CK-USB2.0AA-XXXSW24

