

NOTE

1: Cable:28AWG
 1/0.32BC*1P+1/0.254BC*1C+AL*5P+1/0.254BC*
 4C+AL+1/0.0.254BC+128#/0.12AL*1C OD7.3

2: CONNECTOR: P1 & P2 HDMI 19P FEMALE /
 MALE BLACK ,GOLD PLATED SHELL

3: SUPPORT 3840*2160P/60HZ

4: HOOD:


P2:MOLDED 45P PVC;

P1: MOUDLE:BLACK ABS.

5: TEST:100% ELECTRICAL TESTING



WIRE CONNECTION

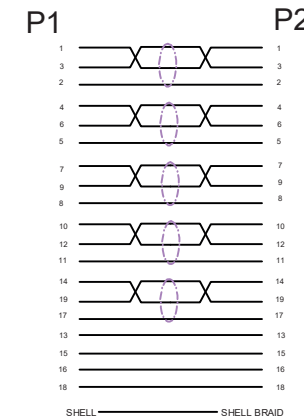

OTHER TOLERANCE: ± 0.3

HDMI 2.0 cable, HDMI female type A for panel mount with 25mm screw distance to HDMI male type A, cable type HDMI 2.0 for resolution up to 4K/60Hz, RF-Blok shield

Partnumber	length (m)
CK-HD2FML-0.5M	0.5
CK-HD2FML-1M	1.0
CK-HD2FML-3M	3.0

other lengths available on request



WEEE-Reg.-Nr. DE 38986660

Date:
16.08.2023

AB

Checked by:
16.08.2023

FM

Datasheet:

CK-HD2FML-xxM

