


PINOUT CONFIGURATION

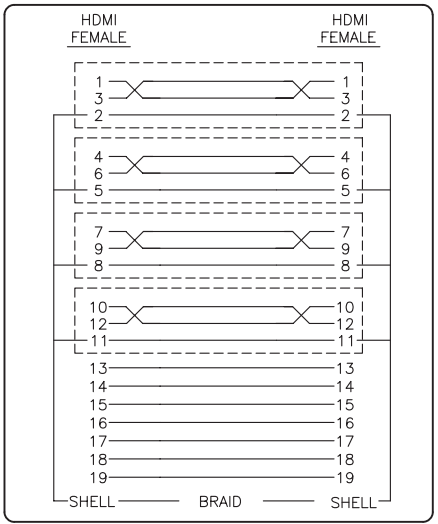

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN. UNII. mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN FEMALE CONNECTOR W/GOLD PLATED PINS	2	PCS.
2	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATED FINISHED SHIELDING METAL CAN	2	PCS.
3	M3/M3 JACKSCREW	2	PCS.
4	(100 Ω SHIELDED TWISTED PAIRS)x4C+(CONTROL WIRE)x7C+ AL-FOIL+DRAIN+SHIELD OVERALL; BLUE GRAY 5168C COLOR POLYOLEFIN ULTRA FLEX JACKET, WITH TTL JACKET PRINTING	SEE	DWG.
	LEVEL-1.5		

HDMI cable Ultraflex Female to Female 0,2m. Both side LOK System one side screw mountable, RF-BLOK shield.

HDMI Kabel Ultraflex Buchse auf Buchse 0,2m. Beidseitig LOK System eine Seite schraubbar, RF-BLOK Schirm.



WEEE-Reg.-Nr. DE 38986660

Date:
12.08.2022

SP

Checked by:
12.08.2022

FM

Datasheet:

CK-HDMIFF-0.2M-UF

Note: Technical modifications reserved; no responsibility is accepted for the accuracy of this information.