

PINOUT CONFIGURATION

HD15 MALE		HD15 FEMALE
1	RED CENTER	1
2	GREEN CENTER	2
3	BLUE CENTER	3
6	RED SHIELD	6
7	GREEN SHIELD	7
8	BLUE SHIELD	8
5		5
4,10,11		4,10,11
9		9
12		12
13		13
14		14
15		15
SHELL	OVERALL BRAID	SHELL

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR	1	PCS.
2	BLACK MOLDED PVC HOOD	1	PCS.
3	PAT.NO.: US 6,287,148 B1 RF-BLOK™SHIELDING METAL CAN	1	PCS.
4	BLACK 4/40 THUMBSCREW	2	PCS.
5	HD15 FEMALE CONNECTOR	1	PCS.
6	#4/40 NUT UNC	2	PCS.
7	BLACK MOLDED PVC HOOD 90°	1	PCS.
8	UL20276 (28AWG COAX+SPIRAL)x3C+28AWGx6C+AL-FOIL+ BRAID OVERALL;BLACK PVC JACKET.	SEE	DWG.



VGA Extension cable Male - Female 90° 3m black

VGA Verlängerungskabel Stecker - Buchse 90° 3m schwarz



WEEE-Reg.-Nr. DE 38986660

Date:
17.08.2022

Checked by:
17.08.2022


Datasheet:

SP

FM



CK-VGA-S1-030

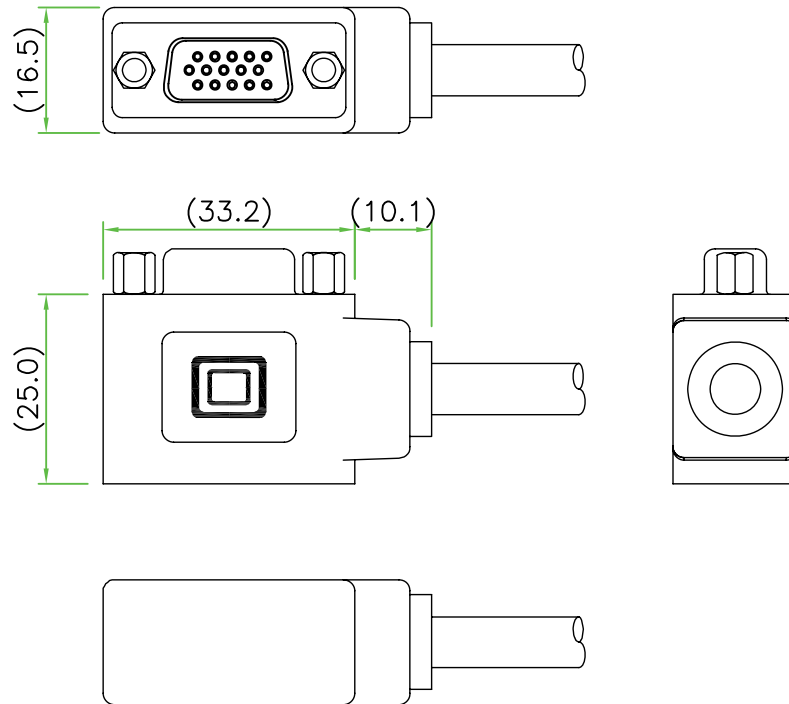

HDB MOLD :
 1. MATERIAL: PVC ,UL94V-1

VGA Extension cable Male - Female 90° 3m black

VGA Verlängerungskabel Stecker - Buchse 90° 3m schwarz



WEEE-Reg.-Nr. DE 38986660

Date:
17.08.2022

SP

Checked by:
17.08.2022

FM

Datasheet:

CK-VGA-S1-030

