


MODULE DRAWING(UNIT:INCH)

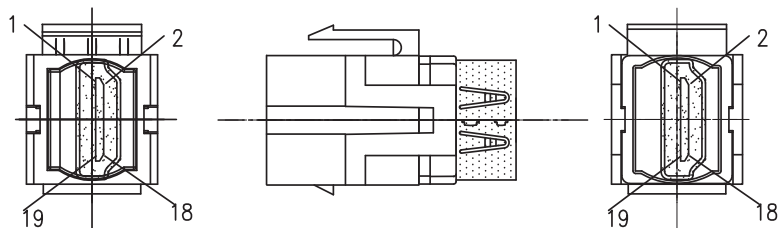

**NOTE:**


- 1.Module: 071D Snap in module, PC+ ABS.
- 2.Adapter: HDMI 19P F/F Adapter, Insulation:Black;Gold Plated Shell.
- 3.Molding 25P PVC .(Molding PVC Color Same With Module)
- 4.MOLD NO .: 071-01(071D,Ellipse), HDMI-12.
- 5.TEST: 100% OPEN AND SHORT TESTING.(1920\*1080P)

**PIN OUT**

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
SHELL	SHELL

**SPECIFICATION**

1. Electrical characteristics
  - Contact Current Rating:0.5 A
  - Dielectric Withstanding Voltage:300V AC
  - Insulation Resistance:a. Mate 100MΩ MIN at 500V/DC
  - b. Unmate 10MΩ MIN at 150V/DC
  - Contact Resistance:30mQ MAX
  - Temperature Range :- 20° C to +85° C
2. Mechanical
  - Mating Face:44. IN MAX
  - Unmating Face:9.8N MIN; 39. 2N MAX
  - Durability: 10000 Cycles
3. material:
  - HOUSING: THERMOPLASTICS HIGH TEMP LCP+GLASS
  - FIBER BLACK COLOR, UL94V-0
  - CONTACT:Copper Alloy , T=0.20MM
  - SHELL:SPCC , T=0. 40MM
4. PLATING:
  - CONTACT: GOLD FLASH, PLATING ON CONTACT AREA
  - 100u"MIN, TIN PLATING ON SOLDER TAILS
  - 50u"MIN, NICKEL UNDERPLATING OVER ALL
  - SHELL: GOLD FLASH, UNDERPLATING OVER ALL

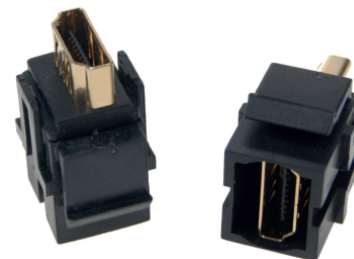

Keystone HDMI Female - Female, works up to HDMI2.0/UHD

**Partnumber**  
PS-KS-HDMI-LCSW  
PS-KS-HDMI-LCWS

**color**  
black  
white



WEEE-Reg.-Nr. DE 38986660

**Date:**  
12.12.2023

AB

**Checked by:**  
12.12.2023

FM

**Datasheet:**

PS-KS-HDMI-LCXX

