


PINOUT CONFIGURATION

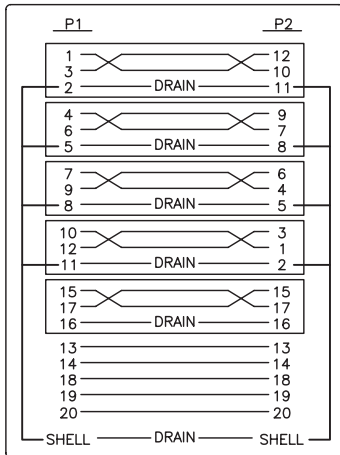

P/N	L(MM)
CK-DPMM-1M	1000±50
CK-DPMM-2M	2000±50

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DISPLAYPORT PLUG SUB-ASS'Y CONNECTOR,GOLD PLATED PINS	2	PCS.
2	INNER METAL SHELL	2	PCS.
3	PLASTIC ASSEMBLY HOOD, BLACK, UL-V0	2	PCS.
4	COPPER FOIL 360°	2	PCS.
5	(28AWGx1PAIR+DRAIN+AL+MYLAR)x5C+28AWGx5C+AL-FOIL+ DRAIN+BRAID SHIELD OVERALL; BLACK PVC JACKET.	SEE	DWG.

NOTE:
1. JACKET PRINTING:

E193793 AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES LTD.®

DisplayPort Cable DP1.4 Male to Male, plastic hood with lock, AWG28

DisplayPort-Kabel DP1.4 Stecker auf Stecker, Kunststoffhaube mit Verriegelung, AWG28



WEEE-Reg.-Nr. DE 38986660

Date:
17.08.2022

Checked by:
17.08.2022

Datasheet:

SP

FM



CK-DPMM-xM