
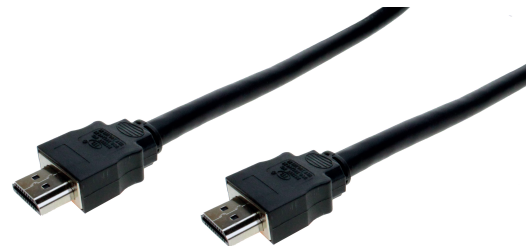


PINOUT CONFIGURATION

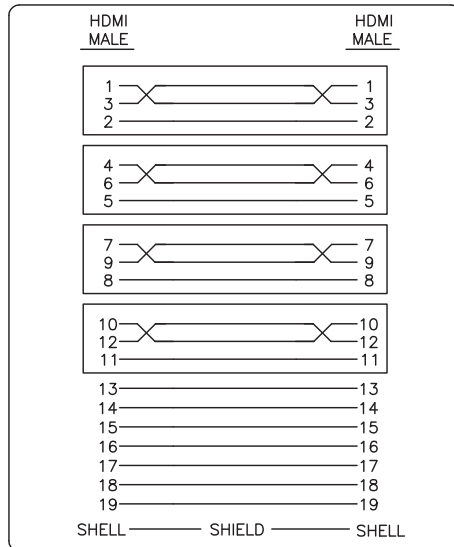

| ITEM | DESCRIPTION   | QTY. | UNIT |
|------|---|------|------|
| 1    | HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED PINS UL94V-0   | 2    | PCS  |
| 2    | CHARCOAL CH123 MOLDED PVC HOOD  | 2    | PCS  |
| 3    | PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN   | 2    | PCS  |
| 4    | (100Ω SHIELDED TWISTED PAIRS)x4+7C WIRE; AL-FOIL+DRAIN +85% BRAID; CHARCOAL CH123 PVC JACKET. <b>LEVEL-2.50</b> | SEE  | DWG  |

UNIT: mm

NOTE:

- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™-SHIELDING DESIGN.
- WIRE MARKING:  
 (TTL)® E193793 AWM 20276 80°C 30V VW-1 TOTAL TECHNOLOGIES. LTD.®  $\frac{1}{4}$ " (1 INCH) <<< 20.4 Gbps  
 2160P 8.3 Mega Pixels 4k HIGH-SPEED DIGITAL AV CABLE *DigiBahn™* H2.0 LEVEL-2.50 SERIES >>>
- PASS 4K60P 18Gbps BANDWITH REQUIREMENT
- PASS 1080P 5Gbps BANDWITH REQUIREMENT

| P/N            | L(MM)     | NOTE |
|----------------|-----------|------|
| CK-HDMI-050DBC | 5000±150  | 3    |
| CK-HDMI-075DBC | 7500±250  |      |
| CK-HDMI-100DBC | 10000±250 | 4    |

HDMI 2.0 cable male - male, black. Resolution 4K/UHD RF-BLOK shield.

HDMI 2.0 Kabel Stecker - Stecker, schwarz. Auflösung 4K/UHD RF-BLOK Schild.



WEEE-Reg.-Nr. DE 38986660

|                           |                |
|---------------------------|----------------|
| Date:<br>11.08.2022       | SP             |
| Checked by:<br>11.08.2022 | FM             |
| Datasheet:                | CK-HDMI-XXXDBC |

