



ALL MATERIAL ARE RoHS COMPLIANT

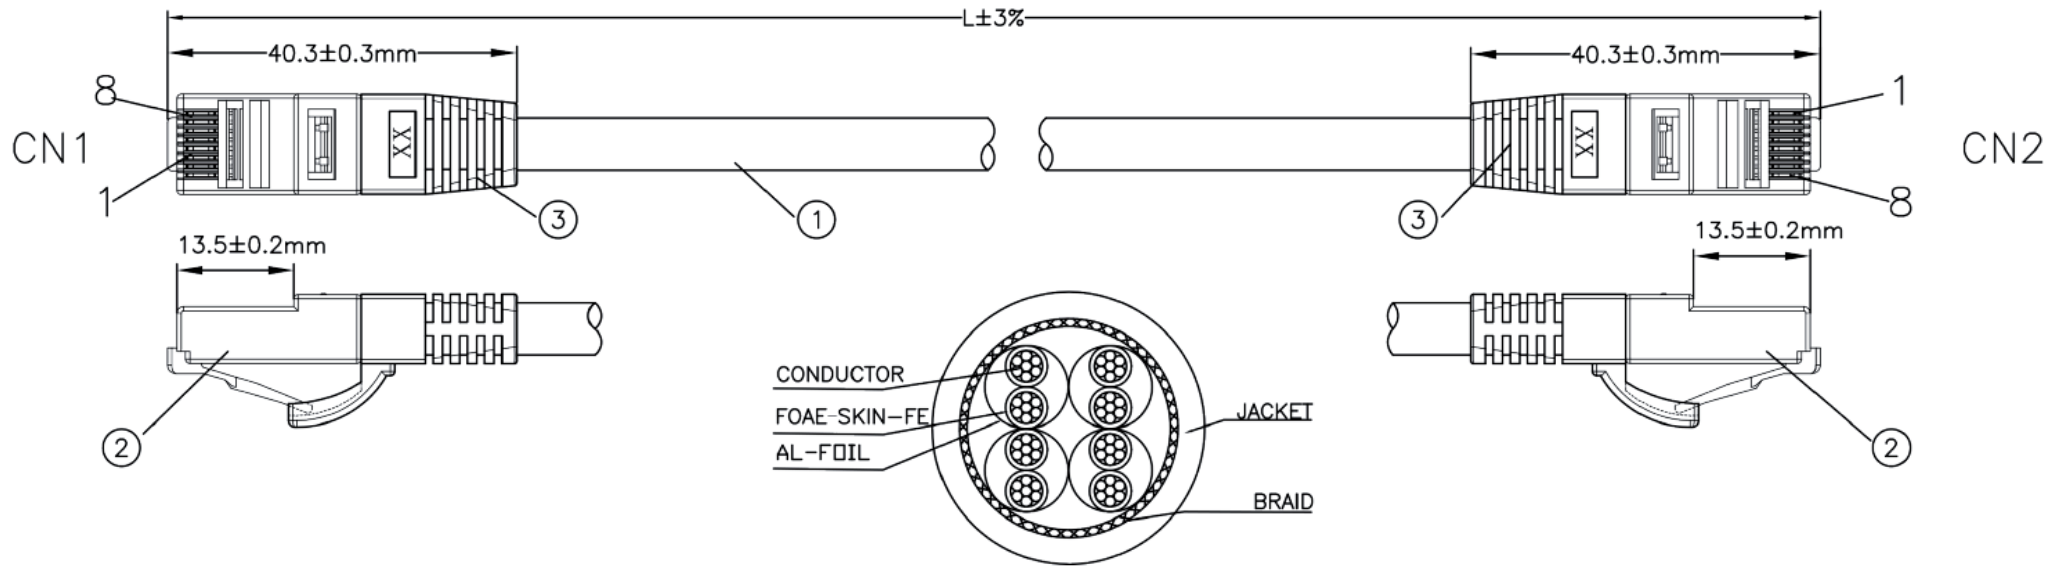

PIN OUT

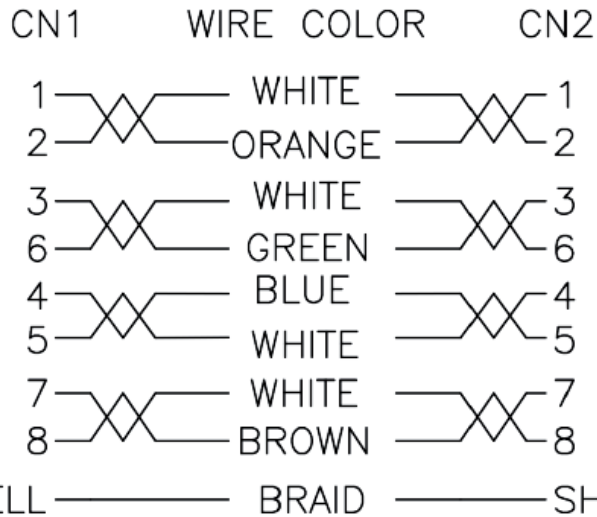

BRAID/SHIELD CONSTRUCTION 0.12/4/16 AL-MG ≥40%

Marking: TTL NETWORK S/FTP CAT6A STRANDED 26AWG 4P LSOH PATCH ISO/IEC 11801 EN50173 AND ANSI/TIA-568-C.2

ELECTRONIC TEST: A.OPEN/SHORT/INTERMITTENCE: 100%


UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	S/FTP (26AWG*1PR+A)*4+B+LSOH COLOR: ASSORTED UPON REQUEST OD: 5.8±0.2mm		
2	RJ45, 8P8C, TWO FORK GOLD PLATED CONTACTS 50u" YELLOW TRANSPARENT WITH METAL HOUSING	2	PCS.
3	MOLDING PVC 45P COLOR: ASSORTED UPON REQUEST	2	PCS.

conform to IEC 60332-1
temperature range: -20°C ~ 75°C

Assignment according to: TIA 568 B

Date:	05.04.2016	AB	
Edited by:	05.04.2016	AB	
Checked by:	05.04.2016	FM	
Revision:	07.05.2024	AB	
Part number:			CK-PK04A-XXX
Patchcord CAT6A, 2xCAT6A RJ45 Male Connector, cable S/FTP (PiMF) 4x2xAWG26 LSOH, inner conductor bare copper, length imprint, DELTA certified			

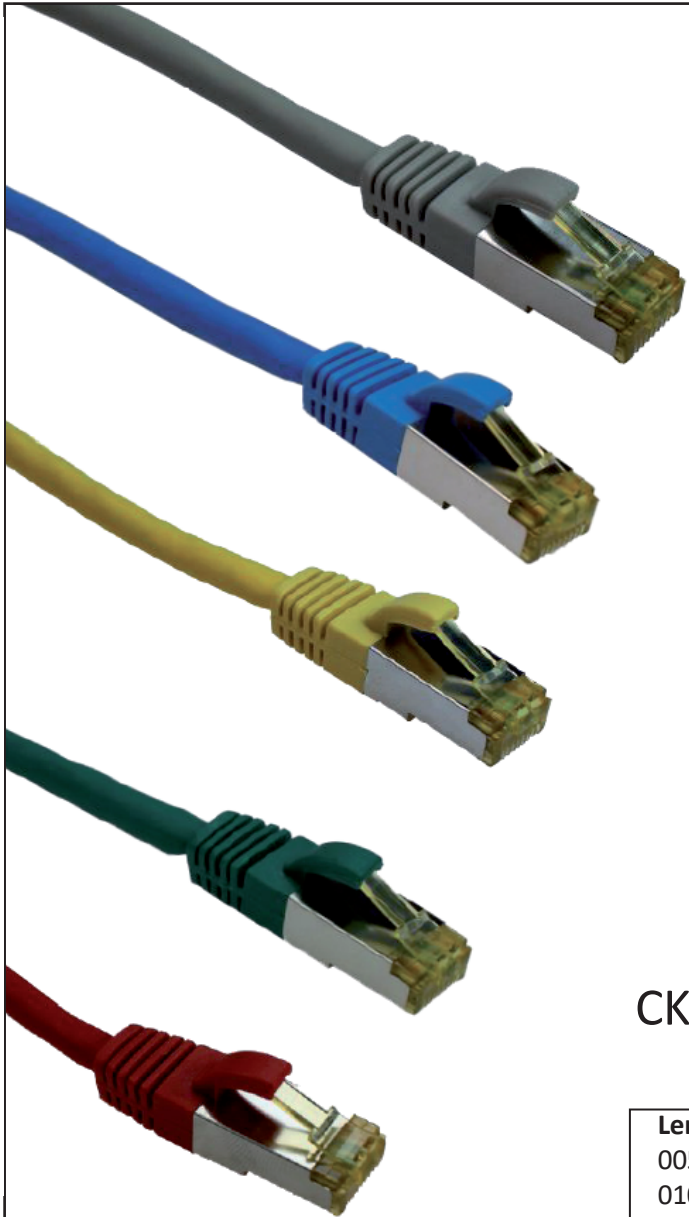

Bez./Artikel:

- Patchkabel S/FTP Cat. 6A L=x,xM LSHF / LSOH / LSZH (identisch), grau , RJ45, AWG26

Text:

- Vollgeschirmtes Cat 6A Patchkabel AWG 26/7 Länge: 0,5M

Prüfung:

- Cat. 6A-Komponentenprüfung nach ISO/IEC 11801-1 und IEC 61935-2
 - DELTA Zertifizierung gilt Weltweit da größte Zertifizierungsanstalt

Stecker:

- Type 2xRJ45 geschirmt
 - Kontakte vergoldet
 - Beschaltung 1:1 nach EIA/TIA-568B
 - Knickschutz mit Rastnasenschutz

Kabel:

- Type S/FTP 4x2xAWG26/7 PIMF
 - Mantel LSOH / LSFH / LSZH alles Identisch
 - Farbe grau

Geeignet für:

- Class EA-Link bis 500 MHz nach ISO/IEC 11801-1, DIN EN50173-1
 - 10Gbit-Ethernet
 - PoE, PoE Plus und UPoE

CK-PK04A-XXXXXX

Lenght	
005	= 0,5 m
010	= 1,0 m
020	= 2,0 m
030	= 3,0 m
050	= 5,0 m
075	= 7,5 m
100	= 10,0 m
150	= 15,0 m

Color	
GR	= grey
BL	= blue
GE	= yellow
GN	= green
RT	= red
SW	= black

Date: 05.04.2016	AB	
Edited by: 05.04.2016	AB	
Checked by: 05.04.2016	FM	
Revision: 17.12.2020	AB	Part number: CK-PK04A-XXX
Patchcord CAT6A, 2xCAT6A RJ45 Male Connector, cable S/FTP (PiMF) 4x2xAWG26 LSOH, inner conductor bare copper, length imprint, DELTA certified		