


PINOUT CONFIGURATION



UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN MALE CONNECTOR GOLD PLATED PINS & SHELL UL94V-0; WITH TTL LOGO	2	PCS.
2	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
3	BLUE GRAY 5168C MOLDED PVC HOOD	2	PCS.
4	(100 Ø SHIELDED TWISTED PAIRS)x4C+(CONTROL WIRE)x7C+ AL-FOIL+DRAIN+SHIELD OVERALL; BLUE GRAY 5168C COLOR POLYOLEFIN ULTRA FLEX JACKET, WITH TTL JACKET PRINTING	SEE	DWG.

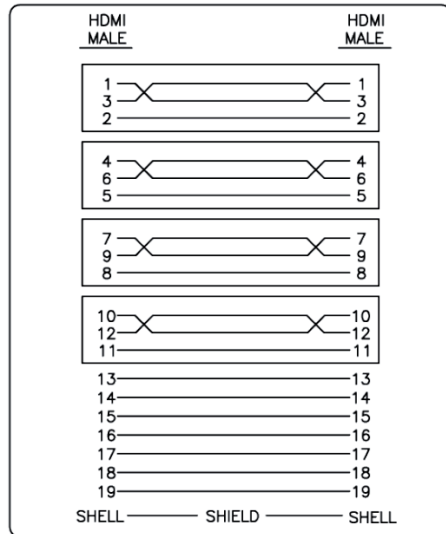

NOTE:

1. JACKET PRINTING:

ULTRA FLEX **HI-PQ**® CABLE TOTAL TECHNOLOGIES LTD.®

UltraFlex High-Speed HDMI cable male - male blue/grey, RF-BLOK shield.  
Resolution up to UHD/DMI 2.0.

UltraFlex High-Speed HDMI Kabel Stecker - Stecker blau/grau,  
RF-BLOK Abschirmung. Auflösung bis zu UHD/DMI 2.0.

P/N	L ± (mm)	
CK-HDMI-010UF	500 ± 50	LEVEL-0.5
CK-HDMI-020UF	2000 ± 50	
CK-HDMI-030UF	3000 ± 100	
CK-HDMI-050UF	5000 ± 150	LEVEL-1.5



WEEE-Reg.-Nr. DE 38986660

Date: 11.08.2022	SP
Checked by: 11.08.2022	FM
Datasheet:	CK-HDMI-XXXUF

