




ALL MATERIAL ARE RoHS COMPLIANT

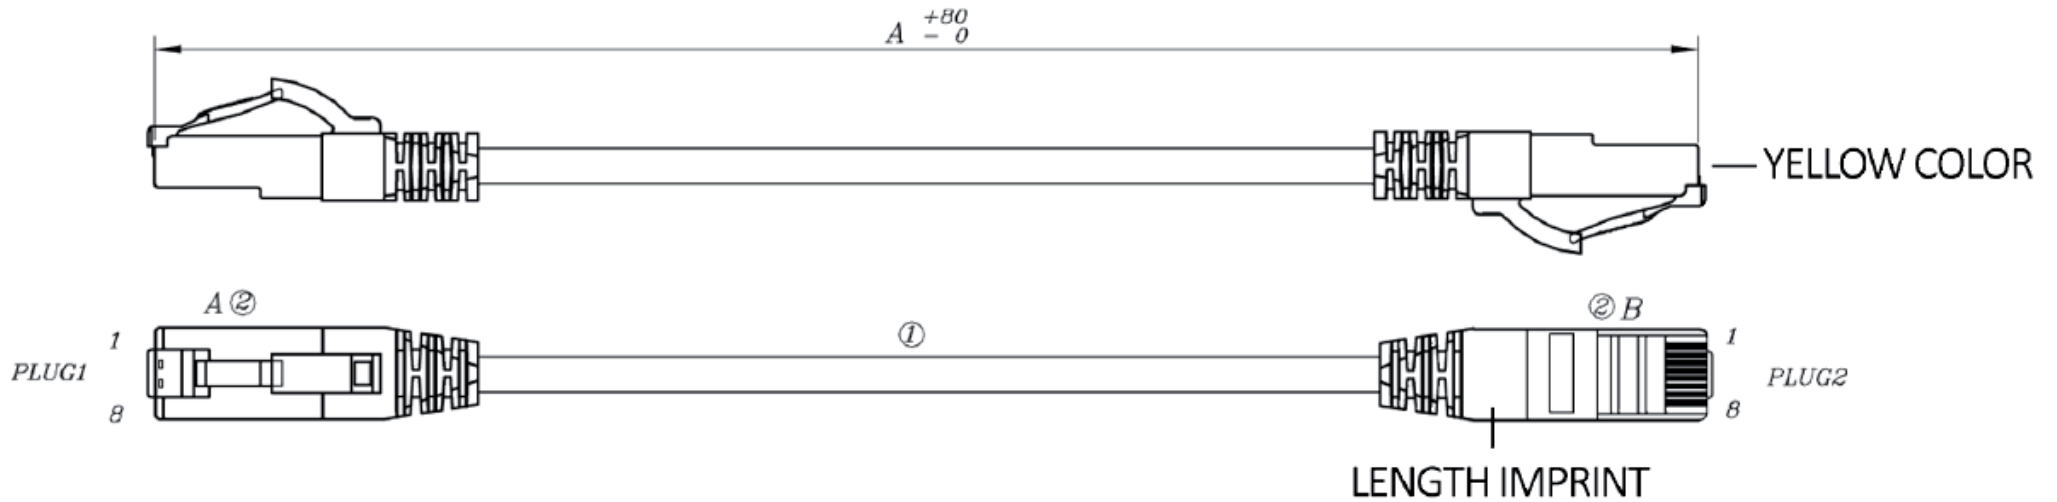

ARRANGE METHOD:



WIRE CONNECTION TABLE							
white/ orange	orange	white/ green	blue	white/ blue	green	white/ brown	brown
A1	A2	A3	A4	A5	A6	A7	A8
B1	B2	B3	B4	B5	B6	B7	B8

UNIT: mm

CK-PKUF-XXXXXX

Length	
0025	= 0,25 m
005	= 0,5 m
010	= 1,0 m
020	= 2,0 m
030	= 3,0 m
050	= 5,0 m
075	= 7,5 m
100	= 10,0 m

Color	
BL	= blue
GE	= yellow
GN	= green
RT	= red
-	= blue/grey

ITEM	DESCRIPTION	QTY.	UNIT
1	CABLE: CAT.6A S/FTP, STRANDED BARE COPPER, 4PAIRS WIRES, 26AWG, JACKET LSOH-TPE, OD: 6.5MM	SEE	DWG.
2	PLUG: CAT.6 SHIELDED TYPE PLUG WITH 3 PRONGS, 50U", 8P8C, UL94-V2	2	PCS.
	MATING CYCLE > 1200, YELLOW COLOR		
3	PACKING: PE BAG WITH LABEL	1	PCS.
4	PRINTING: TTL-NETWORK ULTRA FLEX CAT.6A 4PR 26 AWG	1	PCS.

Date:	05.04.2016	AB
Edited by:	05.04.2016	AB
Checked by:	05.04.2016	FM
Revision:		Part number: CK-PKUF-XXX



Patch cable S/FTP CAT6A Ultraflex LSOH blue/grey 4x2xAWG26/7 LSOH